


IntelliTrac

Imagine - IT300 installation quick guide



Mounting the Device

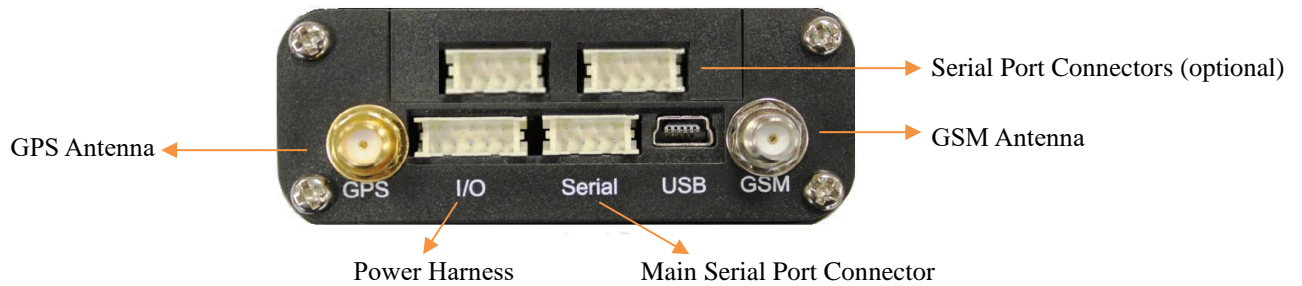

- Insert mounting tabs into the body of the device
- Use screws to firmly fix device to a flat surface
- Discreetly mounted under dash
- DO NOT cable tie to looms/harnesses
- DO NOT mount next to sources of electrical noise (engine management system, coil, leads, distributor etc.)

GPS Antenna



- Clear view of the sky in all directions
- Mounted on a horizontal metal surface
- Mounted to a metal surface minimum 10cm x 10cm
- Discreetly mounted under dash or rear parcel shelf



- DO NOT mount to plastic
- DO NOT mount next to sources of electrical noise (engine management system, coil, leads, distributor etc.)
- DO NOT mount near GSM or other antennas allow 50cm clearance

GSM Antenna



- Mount away from any solid metal
- Mount high up in dash to plastic
- Where possible mount discreetly



- DO NOT stick GSM antenna on metal surface
- DO NOT mount near GPS or other antennas allow 50cm clearance
- DO NOT mount next to sources of electrical noise (engine management system, coil, leads, distributor etc.)

Power Harness I/O



Basic 3 Wire Connection	
Red	Battery 12-24 VDC (fused)
White	Ignition 12-24 VDC
Black	Ground

Contact IntelliTrac regarding additional wiring information (external inputs etc.)

LED Indicators, regular operation

Indicators	Blinking Behavior	Status
GSM (Red)	0.6 second on/ 0.6 second off	Not Ready or Searching GSM signal
	0.1 second on / 3 seconds off	Registered to network successfully
GPS (Green)	Off	GPS off
	1 second on / 1 seconds off	GPS not fixed
	Solid on	GPS fixed



BEFORE LEAVING VEHICLE

Confirm installation and activate device by calling IntelliTrac on

03 9467 6188 (option 7 followed by option 1)

a service representative will confirm the device is operating correctly and calibrate odometer/hourmeter